



Features

- 1080p HD IR Vari-Focal long range camera
- 1/2.8" CMOS sensor, 30fps
- H.264 compression
- 3 independent video streams
- f=9mm ~ 22mm vari-focal lens
- 40m – 50m IR illumination range
- True day & night operation with auto IR-cut filter
- IP66 weather proof
- Power over Ethernet, PoE



Specifications

MODEL		MP276E-HD
VIDEO	IMAGE SENSOR	1/2.8" CMOS sensor
	RESOLUTION	1920 x 1080 (1080p) / 1280 x 720 (720p) / 640 x 480 (VGA) / 320 x 240 (QVGA)
	FRAME RATE	Up to 30 fps (1080p) / 30fps (720p)
	MINIMUM ILLUMINATION	0.0 Lux, IR ON, 40-50m
	LENS	f=9mm ~ 22mm
	AUTO IR-CUT FILTER	Yes
	VIDEO SETTINGS	Brightness/Contrast/Saturation, Region Of Interest Coding, Wide Dynamic, Sharpness, Noise Reduction
CONNECTIVITY	NETWORK INTERFACE	RJ-45
	NETWORK PROTOCOL	TCP/IP, UDP, DHCP, NTP, RTSP, SMTP
	DYNAMIC IP	DDNS
	VIDEO MAIN STREAM RESOLUTION	1920 x 1080 (30fps) / 1280 x 720 (30fps)
	VIDEO SUB STREAM RESOLUTION	1280 x 720 (10fps) / 640 x 480 (30fps) / 320 x 240 (30fps)
	CONCURRENT USERS	4 (Independent)
	WEB SERVER	Built-in
COMPRESSION	VIDEO COMPRESSION	H.264
	VIDEO STREAMING	3 Independent Streams
POWER	POWER IN	12V DC / PoE (IEEE 802.3af)
	MAX. RATING	2.64W / 6.72W (IR On)
OPERATING ENVIRONMENT	AMBIENT TEMPERATURE	-40°C - 50°C
	RELATIVE HUMIDITY	10 ~ 90% (No Condensation)
MECHANICAL DESIGN	WEATHER PROOF	IP66
	NET WEIGHT	1.7kg

Dimensions

Dim

Unit: mm

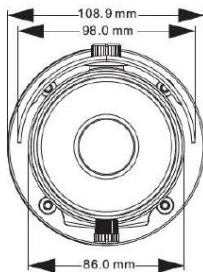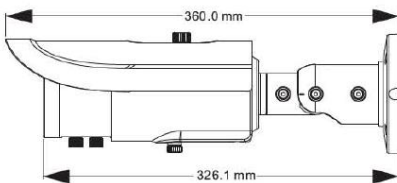

www.TeleEye.com

TeleEye Group

Hong Kong Bangladesh China Malaysia
Philippines South Africa Sri Lanka Turkey U.K.

DISTRIBUTED BY: