



Features


- 4MP AHD & IP Hybrid Design
- Max. recording resolution: 4MP (2560 x 1440)
- H.264 video compression
- 2 internal SATA HDD
- HDMI (4K) / VGA video outputs
- Video extraction through network or using USB flash drive
- Video management software with sureSIGHT
- Supporting sureLINK for dynamic IP Internet connection
- iView HD for remote monitoring on mobile phones

Specifications

MODEL		JN6408-S
VIDEO INPUT	ANALOG CAMERA	4MP, 3MP, 1080P, 720P, WD1
	NO. OF CHANNEL	8
	IP CAMERA	MP, MQ Series(4MP / 3MP / 1080P / 960P / 720P)
	NO. OF CHANNEL	4
VIDEO OUTPUT	Digital Video	1 channel, 3840 x 2160, 1920 x 1080, 1280 x 1024
	VGA	1 channel, 1920 x 1080, 1280 x 1024
	BNC	CVBS (used as spot output)
AUDIO	INPUT	RCA x 4
	OUTPUT	RCA x 1
	IP CAMERA AUDIO INPUT	4
RECORDING	MODE	Manual, Schedule, Motion, Event-driven
	HD TYPE	SATA X 2 (Max. 8TB per HDD)
	MAX. RECORDING RATE PER CHANNEL	4MP / 3MP : 12 fps (PAL) / 15 fps (NTSC) 1080P / 720P / WD1 : 25 fps (PAL) / 30 fps (NTSC) MP, MQ: 25 / 30fps
	PLAYBACK	Play, Forward, Backward, Pause, Digital zoom
COMMUNICATION	NETWORK	RJ45 10/100Mbps x 1
	CONCURRENT USER	5
	WEB SERVER	Built-in
	RS485	RS485 x1, connect to PTZ or keyboard
	USB	USB2.0 x 1 (front panel), USB3.0 x 1 (rear panel)
EVENT HANDLING	EVENT TYPE	Video motion detection, External alarm, Video loss
	ACTION TYPE	Recording, Snap, Email, Preset
	ALARM INPUT	4
	ALARM OUTPUT	1
POWER	VOLTAGE	12V DC
	MAX. RATING	15W (without HDD)
OPERATING ENVIRONMENT	AMBIENT TEMPERATURE	-10°C - 50°C
	RELATIVE HUMIDITY	10% - 90%
MECHANICAL DESIGN	DIMENSION	380mm (W) x 280mm (D) x 52mm (H)
	WEIGHT	1.58

Dimensions

Unit: mm

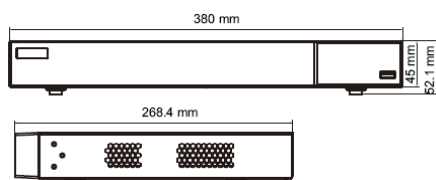

TeleEye

Hong Kong China Malaysia Philippines
South Africa Sri Lanka Turkey U.K.

DISTRIBUTED BY:

www.TeleEye.com



Features


- 4MP AHD & IP Hybrid Design
- Max. recording resolution: 4MP (2560 x 1440)
- H.264 video compression
- 2 internal SATA HDD
- HDMI (4K) / VGA video outputs
- Video extraction through network or using USB flash drive
- Video management software with sureSIGHT
- Supporting sureLINK for dynamic IP Internet connection
- iView HD for remote monitoring on mobile phones

Specifications

MODEL		JN6416-S
VIDEO INPUT	ANALOG CAMERA	4MP, 3MP, 1080P, 720P, WD1
	NO. OF CHANNEL	16
	IP CAMERA	MP, MQ Series(4MP / 3MP / 1080P / 960P / 720P)
	NO. OF CHANNEL	4
VIDEO OUTPUT	Digital Video	1 channel, 3840 x 2160, 1920 x 1080, 1280 x 1024
	VGA	1 channel, 1920 x 1080, 1280 x 1024
	BNC	CVBS (used as spot output)
AUDIO	INPUT	RCA x 4
	OUTPUT	RCA x 1
	IP CAMERA AUDIO INPUT	4
RECORDING	MODE	Manual, Schedule, Motion, Event-driven
	HD TYPE	SATA X 2 (Max. 8TB per HDD)
	MAX. RECORDING RATE PER CHANNEL	4MP / 3MP : 12 fps (PAL) / 15 fps (NTSC) 1080P / 720P / WD1 : 25 fps (PAL) / 30 fps (NTSC) MP, MQ: 25 / 30fps
	PLAYBACK	Play, Forward, Backward, Pause, Digital zoom
COMMUNICATION	NETWORK	RJ45 10/100/1000Mbps x 1
	CONCURRENT USER	10
	WEB SERVER	Built-in
	RS485	RS485 x1, connect to PTZ or keyboard
	USB	USB2.0 x 1 (front panel), USB3.0 x 1 (rear panel)
EVENT HANDLING	EVENT TYPE	Video motion detection, External alarm, Video loss
	ACTION TYPE	Recording, Snap, Email, Preset
	ALARM INPUT	4
	ALARM OUTPUT	1
POWER	VOLTAGE	12V DC
	MAX. RATING	18W (without HDD)
OPERATING ENVIRONMENT	AMBIENT TEMPERATURE	-10°C - 50°C
	RELATIVE HUMIDITY	10% - 90%
MECHANICAL DESIGN	DIMENSION	380mm (W) x 280mm (D) x 52mm (H)
	WEIGHT	1.58

Dimensions

Unit: mm

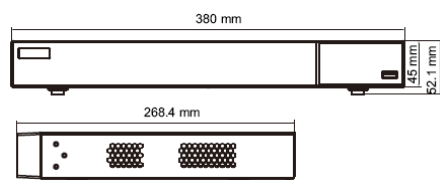

TeleEye

Hong Kong China Malaysia Philippines
South Africa Sri Lanka Turkey U.K.

DISTRIBUTED BY:

www.TeleEye.com



Features


- AHD & IP Hybrid Design
- Max. recording resolution: 1920 x 1080p
- H.264 video compression
- 1 internal SATA HDD
- HDMI/VGA video outputs
- Video extraction through network or using USB flash drive
- Video management software with sureSIGHT
- Supporting sureLINK for dynamic IP Internet connection
- iView HD for remote monitoring on mobile phones

Specifications

MODEL		JN6204B-S	JN6208B-S
VIDEO INPUT	ANALOG CAMERA	AHD (1080p), AHD (720p), PAL, NTSC	
	NO. OF CHANNEL	4	8
	IP CAMERA	TeleEye MP, MQ Series	
	NO. OF CHANNEL	1	
VIDEO OUTPUT	MAIN	DIGITAL VIDEO	1 channel, 1920 x 1080
		VGA	1 channel, 1920 x 1080
		BNC	CVBS
RECORDING	MODE		Manual, Schedule, Motion, Event-driven
	HD TYPE		SATA X 1 (Max. 6TB per HDD)
	MAX. RECORDING RATE PER CHANNEL		1080p: 12 / 15fps 1080p lite: 25 / 30fps 720p: 25 / 30fps WD1: 25 / 30fps MP, MQ: 25 / 30fps
	PLAYBACK		Play, Forward, Backward, Pause, Digital Zoom
COMMUNICATION	NETWORK		RJ-45, 10/100 base-T ethernet (auto-sensing)
	CONCURRENT USER		5
	WEB SERVER		Built-in
	TELEMETRY CONTROL		RS 485
	USB		USB2.0 x 2
AUDIO	INPUT		RCA X 4
	OUTPUT		RCA X 1
	IP CAMERA AUDIO INPUT		1
EVENT HANDLING	EVENT TYPE		Video motion detection, External alarm, Video loss
	ACTION TYPE		Local recording, E-mail notification, Telemetry preset
	EXTERNAL ALARM INPUTS		4
	IP CAMERA ALARM INPUT		1
RELAY SWITCH	NO. OF CHANNEL		1
POWER	VOLTAGE		12V DC
	MAX. RATING	5W (without HDD)	8W (without HDD)
OPERATING ENVIRONMENT	AMBIENT TEMPERATURE		-10°C - 50°C
	RELATIVE HUMIDITY		10% - 90%
MECHANICAL DESIGN	DIMENSION (mm)		300 (W) x 260 (D) x 52 (H)
	WEIGHT (kg)		1.08 1.16

Dimensions

Unit: mm

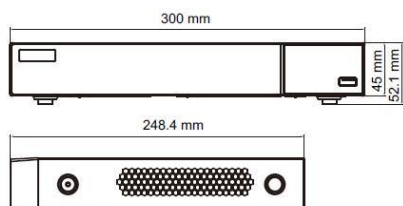

TeleEye

Hong Kong China Malaysia Philippines
South Africa Sri Lanka Turkey U.K.

DISTRIBUTED BY:

www.TeleEye.com



Features


- AHD & IP Hybrid Design
- Max. recording resolution: 1920 x 1080p
- H.264 video compression
- 2 internal SATA HDD
- HDMI/VGA video outputs
- Video extraction through network or using USB flash drive
- Video management software with sureSIGHT
- Supporting sureLINK for dynamic IP Internet connection
- iView HD for remote monitoring on mobile phones

Specifications

MODEL		JN6216B-S
VIDEO INPUT	ANALOG CAMERA	
	AHD (1080p), AHD (720p), PAL, NTSC	
	NO. OF CHANNEL	
	16	
VIDEO OUTPUT	IP CAMERA	
	TeleEye MP, MQ Series	
	NO. OF CHANNEL	
	8	
VIDEO OUTPUT	MAIN	DIGITAL VIDEO
		1 channel, 1920 x 1080
		VGA
		1 channel, 1920 x 1080
RECORDING	BNC	
	CVBS	
	MODE	
	Manual, Schedule, Motion, Event-driven	
RECORDING	HD TYPE	
	SATA X 2 (Max. 6TB per HDD)	
	MAX. RECORDING RATE PER CHANNEL	
	1080p: 12 / 15fps 1080p lite: 25 / 30fps 720p: 25 / 30fps WD1: 25 / 30fps MP, MQ: 25 / 30fps	
COMMUNICATION	PLAYBACK	
	Play, Forward, Backward, Pause, Digital zoom	
	NETWORK	
	RJ-45 10/100 base-T ethernet (auto sensing)	
AUDIO	CONCURRENT USER	
	6	
	WEB SERVER	
	Built-in	
EVENT HANDLING	TELEMETRY CONTROL	
	RS 485	
	USB	
	USB2.0 x 2	
RELAY SWITCH	INPUT	
	RCA X 4	
	OUTPUT	
	RCA X 1	
POWER	IP CAMERA AUDIO INPUT	
	8	
	EVENT TYPE	
	Video motion detection, External alarm, Video loss	
MECHANICAL DESIGN	ACTION TYPE	
	Local recording, E-mail notification, Telemetry preset	
	EXTERNAL ALARM INPUT	
	4	
OPERATING ENVIRONMENT	NO. OF CHANNEL	
	1	
	VOLTAGE	
	12V DC	
MECHANICAL DESIGN	MAX. RATING	
	15W (without HDD)	
	AMBIENT TEMPERATURE	
	-10°C - 50°C	
MECHANICAL DESIGN	RELATIVE HUMIDITY	
	10% - 90%	
	DIMENSION	
	380mm (W) x 280mm (D) x 52mm (H)	
MECHANICAL DESIGN	WEIGHT (kg)	
	1.58	

Dimensions

Unit: mm

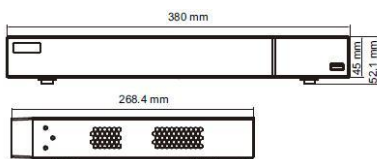

TeleEye
Hong Kong China Malaysia Philippines
South Africa Sri Lanka Turkey U.K.

DISTRIBUTED BY:

www.TeleEye.com

Design and specifications are subject to change without prior notice. Copyright © 2016 Signal Communications Limited. TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.

Printed: 2016/12




Features

- AHD & IP Hybrid Design
- Max. recording resolution: 1920 x 1080p
- H.264 video compression
- 8 internal SATA HDD
- 16 Audio & alarm inputs
- Video extraction through network or using USB flash drive
- Video management software with sureSIGHT
- Supporting sureLINK for dynamic IP Internet connection
- iView HD for remote monitoring on mobile phones

Specifications

MODEL		JN6316-S
VIDEO INPUT	ANALOG CAMERA	AHD (1080p), AHD (720p), PAL, NTSC
	NO. OF CHANNEL	16
	IP CAMERA	TeleEye MP, MQ Series
	NO. OF CHANNEL	4
VIDEO OUTPUT	Digital Video	1 channel, 1920 x 1080
	VGA	1 channel
	BNC	1 channel, CVBS (main output or spot output)
RECORDING	MODE	Manual, Schedule, Motion, Event-driven
	HDD TYPE	SATA x 8 (Max. 8TB per HDD)
	MAX. RECORDING RATE PER CHANNEL	3MP, 1080P, 960P, 720P Frame rate: 25fps(PAL) / 30fps(NTSC)
		1080P : 12 fps (PAL) / 15 fps (NTSC)
		1080P lite / 720P / WD1 : 25 fps (PAL) / 30 fps (NTSC)
	PLAYBACK	Play, forward, backward, pause, digital zoom
COMMUNICATION	NETWORK	RJ45 10M / 100Mbps x 1
	CONCURRENT USER	10
	WEB SERVER	Built-in
	TELEMETRY CONTROL	RS 485 x 2
	USB	USB2.0 x 2
AUDIO	INPUT	RCA X 16
	OUTPUT	RCA X 1
	IP CAMERA AUDIO INPUT	4
EVENT HANDLING	EVENT TYPE	Video motion detection, External alarm, Video loss
	ACTION TYPE	Local recording, email notification, telemetry preset
	EXTERNAL ALARM INPUT	16
	ALARM OUTPUT	4
POWER	VOLTAGE	ATX
	MAX. RATING	≤ 40W (without HDD), Max. 250W
OPERATING ENVIRONMENT	AMBIENT TEMPERATURE	-10°C - 50°C
	RELATIVE HUMIDITY	10% - 90%
MECHANICAL DESIGN	DIMENSION	430mm (W) x 468mm (D) x 101mm (H)
	WEIGHT	10Kg

Dimensions

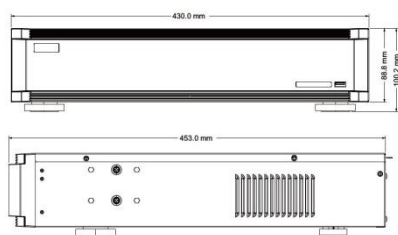

www.TeleEye.com

TeleEye

Hong Kong China Malaysia Philippines
South Africa Sri Lanka Turkey U.K.

DISTRIBUTED BY: