

- 1/2.7" 5MP CMOS sensor
- 4MP(2560x1440) @ 30fps/
5MP(2592x1944) @ 20fps/
- AHD/ TVI/ CVI/ CVBS video output
- Up to 1500TVL resolution
- f=2.8-12 mm Vari-Focal lens
Angle of view 85.7° - 33.6°
- 20~30M IR illumination range
- IP66 weather proof

AF565



5MP AHD IR Vari-Focal Bullet



Model

AF565

Unit: mm

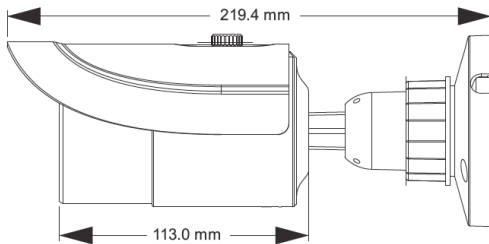

VIDEO

FUNCTION

POWER

OPERATING ENVIRONMENT

MECHANICAL DESIGN

| | |
|-----------------------------|---|
| Image Sensor | 1/2.7" 5MP CMOS |
| Resolution | 4MP 2560x1440(Default output) / 5MP 2592x1944 |
| Video Output | AHD / TVI / CVI / CVBS (BNC) |
| Frame Rate | 5MP@20fps / 4MP@30fps |
| Minimum Illumination | Color : 0.01 lux@F1.2, AGC ON; B/W : 0 lux with IR |
| IR Distance | 20~30M |
| Lens | f=2.8-12mm lens |
| Angle of view | 105° |
| Electronic Shutter | Auto; 1/50s~1/100000s(PAL); 1/60s~1/100000s(NTSC) |
| S/N Ratio | ≥52dB (AGC OFF) |
| Function Control | OSD (COC Control) |
| Day & Night | ICR |
| Digital WDR | Yes |
| Digital NR | Yes (2D DNR) |
| AGC | Yes |
| Auto White Balance | Yes |
| BLC | Yes |
| Mirror Image | Yes |
| Sharpness | Yes |
| Smart IR | Yes |
| Image Setting | Yes |
| Power Supply | 12VDC |
| Power Consumption | IR OFF: < 1W; IR ON: < 4W |
| Ambient Temperature | - 30 °C ~ 50 °C |
| Relative Humidity | 10%-90% |
| Weather Proof | IP66 |
| Dimension | Φ 87mm x 220mm |
| Weight | 570g |

Terms & Conditions 使用細則
Design and specifications are subject to change without prior notice. Copyright © 2018 Signal Communications Limited.
TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.