

AF266C 2MP AHD IR Vari-Focal Bullet



- 1/2.8" 2MP CMOS sensor
- Up to 1000 TVL resolution
- f=2.8 ~ 12mm Vari-Focal Lens
- Angle of view 88.6° - 34.4°
- 30~50M IR illumination range
- IP67 weather proof



Model

AF266C

Unit: mm

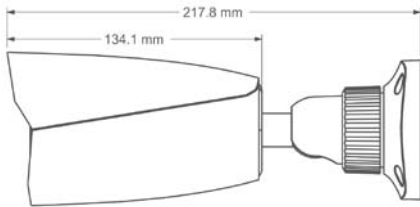

VIDEO	IMAGE SENSOR	1/2.8" 2MP CMOS	
	RESOLUTION	1920 x 1080	
	VIDEO OUTPUT	AHD/TVI/CVI/CVBS (BNC)	
	FRAME RATE	30fps(60Hz), 25fps(50Hz)	
	MINIMUM ILLUMINATION	0Lux (IR ON); Color: 0.01Lux / F1.2, AGC ON;	
	IR LED / IR DISTANCE	30~50M	
	LENS	f=2.8mm ~12mm vari-focal lens	
	ANGLE OF VIEW	88.6° - 34.4°	
	ELECTRONIC SHUTTER	Auto; 1/50s~1/100000s(PAL); 1/60s~1/100000s(NTSC)	
	S/N RATIO	≥52dB (AGC OFF)	
	FUNCTION CONTROL	OSD (COC Control)	
	FUNCTION	DAY & NIGHT	ICR
		WDR	Yes
DIGITAL NR		Yes (2D DNR)	
AGC		Yes	
AUTO WHITE BALANCE		Yes	
BLC		Yes	
HLC		Yes	
IMAGE SETTING		Yes	
SHARPNESS		Yes	
SMART IR		Yes	
POWER	Angle Adjustment	Pan: 0°~360°; Tilt: 0°~80°; Rotation: 0°~360°	
	POWER SUPPLY	12VDC	
	POWER CONSUMPTION	IR OFF: < 1W; IR ON: < 6W	
OPERATING ENVIRONMENT	AMBIENT TEMPERATURE	- 30 °C ~ 50 °C	
	RELATIVE HUMIDITY	10%-90%	
MECHANICAL DESIGN	WEATHER PROOF	IP67	
	DIMENSION	80.5 mm x 80.3 mm x 218 mm	
	WEIGHT	560g	

Terms & Conditions 使用細則

Design and specifications are subject to change without prior notice. Copyright © 2023 Signal Communications Limited. TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, US, and other countries. All other trademarks are the property of their respective owners.