

JN6208B-S

AHD 1080P DVR


- AHD & IP Design
- Max. recording resolution: 1920 x 1080p
- 1 internal SATA HDD
- HDMI / VGA video outputs
- Video extraction through network or using USB flash drive
- Video management software with sureSIGHT
- Supporting sureLINK for dynamic IP Internet connection
- iView HD for remote monitoring on mobile phones



Model

JN6208B-S

Unit: mm

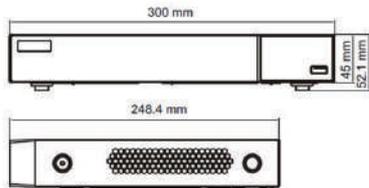

VIDEO INPUT	ANALOG CAMERA	AHD (1080p), AHD (720p), PAL, NTSC
	NO. OF CHANNEL	8
VIDEO OUTPUT	IP CAMERA	TeleEye MP, MQ Series
	NO. OF CHANNEL	1
RECORDING	MAIN	DIGITAL VIDEO 1 channel, 1920 x 1080
	VGA	1 channel, 1920 x 1080
	BNC	CVBS
COMMUNICATION	MODE	Manual, Schedule, Motion, Event-driven
	HD TYPE	SATA X 1 (Max. 6TB per HDD)
	MAX. RECORDING RATE PER CHANNEL	1080p: 12 / 15fps 1080p lite: 25 / 30fps 720p: 25 / 30fps WD1: 25 / 30fps MP, MQ: 25 / 30fps
	PLAYBACK	Play, Forward, Backward, Pause, Digital Zoom
AUDIO	NETWORK	RJ-45, 10/100 base-T ethernet (auto-sensing)
	CONCURRENT USER	5
	WEB SERVER	Built-in
	TELEMETRY CONTROL	RS 485
EVENT HANDLING	USB	USB2.0 x 2
	INPUT	RCA x 4
	OUTPUT	RCA x 1
RELAY SWITCH	IP CAMERA AUDIO INPUT	1
	EVENT TYPE	Video motion detection, External alarm, Video loss
	ACTION TYPE	Local recording, E-mail notification, Telemetry preset
	EXTERNAL ALARM INPUTS	4
POWER	IP CAMERA ALARM INPUT	1
	NO. OF CHANNEL	1
OPERATING ENVIRONMENT	VOLTAGE	12V DC
	MAX. RATING	8W (without HDD)
MECHANICAL DESIGN	AMBIENT TEMPERATURE	-10°C - 50°C
	RELATIVE HUMIDITY	10% - 90%
	DIMENSION (mm)	300 (W) x 260 (D) x 52 (H)
	WEIGHT (kg)	1.16

Terms & Conditions 使用細則

Design and specifications are subject to change without prior notice. Copyright © 2018 Signal Communications Limited. TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.