




Features

- Max. resolution: 1920 x 1080
- 1/2.8" Sony 2MP Starlight CMOS sensor
- Enhanced H.264 compression
- 3 independent video streams
- Vari-focal f=2.8mm ~ 12mm
- 20~30m IR illumination range
- IP66 weather proof
- Power over Ethernet
- ONVIF Profile S

Dimension

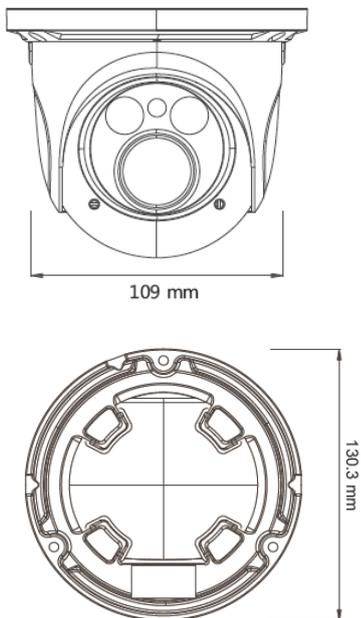

Specifications

| MODEL | | MP2335E-HD |
|-----------------------|----------------------|--|
| VIDEO | IMAGE SENSOR | 1/2.8" Sony 2MP Starlight CMOS |
| | RESOLUTION | 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 x 240 |
| | FRAME RATE | Up to 25/30fps |
| | MINIMUM ILLUMINATION | 0Lux (IR ON); Color: 0.005Lux / F1.2, AGC ON; B/W: 0.001Lux / F1.2, AGC ON |
| | IR DISTANCE | 20-30m |
| | LENS | f=2.8mm ~12mm vari-focal lens |
| | VIEW ANGLE | 95.7° ~ 35.9° |
| | ELECTRONIC SHUTTER | 1 / 25 s ~ 1 / 100000 s |
| | VIDEO SETTINGS | ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. |
| CONNECTIVITY | NETWORK INTERFACE | RJ-45 |
| | NETWORK PROTOCOL | TCP / IP, UDP, DHCP, N Network Protocol TP, RTSP, DDNS, SMTP, FTP |
| | CONCURRENT USERS | 3 |
| | WEB SERVER | Built-in |
| | ONVIF | Profile S |
| COMPRESSION | VIDEO COMPRESSION | Enhanced H.264 |
| | VIDEO STREAMING | 3 Independent Streams |
| EVENT HANDLING | MOTION DETECTION | Yes |
| | ACTION | Email |
| POWER | VOLTAGE | 12VDC |
| | MAX. RATING | 6W |
| | POE | YES |
| OPERATING ENVIRONMENT | AMBIENT TEMPERATURE | -20°C ~ 50°C |
| | RELATIVE HUMIDITY | 10%-90% |
| MECHANICAL DESIGN | WEATHER PROOF | IP66 |
| | DIMENSION | Φ 109mm x 130mm |
| | WEIGHT | 690g |

TeleEye Group
Hong Kong China Malaysia Philippines
South Africa Sri Lanka Turkey U.K.

DISTRIBUTED BY:

www.TeleEye.com