



- 1/3" 4MP CMOS sensor
- f=2.8mm fixed lens
Angle of view: 100°
- 10m IR illumination range
- H.265 / H.264 compression
- AI Detection:
Face detection
Human / Vehicle detection
- IP66 & IK10 ingress protection
- Power over Ethernet
- ONVIF Profile S

MP4011BE

4MP Network IR Fixed Dome with AI Detection



Unit: mm

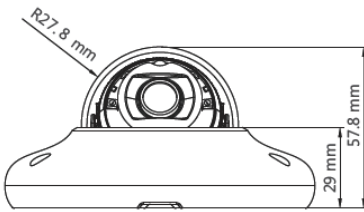

Accessories



Wall Mount Bracket: WM0203

Terms & Conditions 使用細則
Design and specifications are subject to change without prior notice. Copyright © 2020 Signal Communications Limited. TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.

MODEL

MP4011BE

| | | |
|-----------------------|----------------------|--|
| VIDEO | IMAGE SENSOR | 1/3" 4MP CMOS |
| | RESOLUTION | 4MP (2560×1440), 3MP (2304×1296), 1080P (1920×1080), 720P (1280×720), D1, CIF, 480×240 |
| | FRAME RATE | Up to 25/30fps |
| | MINIMUM ILLUMINATION | 0.005 lux @F1.6, AGC ON; 0 lux with IR |
| | IR DISTANCE | 10M |
| | LENS | f=2.8mm @F1.6 fixed lens |
| | ANGLE OF VIEW | 100° |
| | ELECTRONIC SHUTTER | 1 / 30 s ~ 1 / 100000 s |
| AUDIO | VIDEO SETTINGS | ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc |
| | INPUT | 1CH Audio input or 1CH Built-in MIC |
| CONNECTIVITY | NETWORK INTERFACE | RJ45 × 1, 10M / 100M self-adaption |
| | NETWORK PROTOCOL | TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP,HTTP, 802.1x, UPnP, HTTPs, QoS |
| | CONCURRENT USERS | 4 |
| | WEB SERVER | Built-in |
| COMPRESSION | ONVIF | Profile S |
| | VIDEO COMPRESSION | H.265 / H.264 |
| | VIDEO STREAMING | 3 Independent Streams |
| FUNCTIONS | AUDIO COMPRESSION | G711A/U |
| | AI DETECTION | Face detection; Human detection; Vehicle detection |
| | SMART ALARM | Intrusion detection; Line crossing detection; Video Exception; Motion detection |
| EDGE RECORDING | ACTION | Snap, Recording, Email |
| | MICRO SD Card | Max. 128GB |
| POWER | VOLTAGE | 12VDC |
| | MAX. RATING | <7W |
| | POE | YES, IEEE802.af |
| OPERATING ENVIRONMENT | AMBIENT TEMPERATURE | -30°C ~ 60°C |
| | RELATIVE HUMIDITY | Less than 95% (non-condensing) |
| MECHANICAL DESIGN | WATER PROOF | IP66 |
| | VANDAL RESISTANT | IK10 |
| | DIMENSION | Φ 110 mm x 58mm |
| | WEIGHT | 360g |