

MP401E


4MP HD Video Encoder

- 4MP (2560 x 1440)
- H.265
- 3 independent video streams
- PoE Support



Model

MP401E

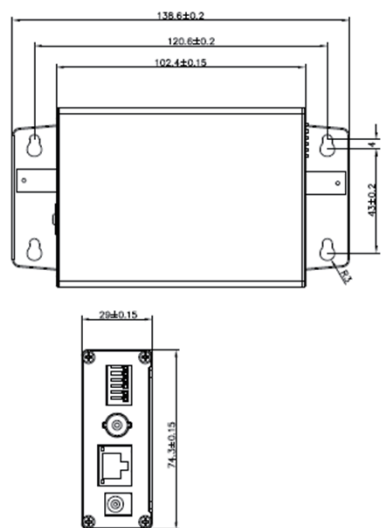

VIDEO	HD ANALOG VIDEO INPUT	1 CH, BNC interface (level : 1.0Vp-p, impedance : 75Ω) 4MP AHD /CVBS; 2MP TVI/AHD/CVBS (PAL / NTSC)
	VIDEO COMPRESSION	H.265 / Enhanced H.264
	OUTPUT RESOLUTION	4MP (2560×1440), 3MP (2304×1296) / (2048×1536), 1080P (1920×1080), 960P (1280×960), 720P (1280×720), D1, CIF, 480×240
AUDIO	BIT RATE	32Kbps ~ 16Mbps
	FRAME RATE	1~30fps
	AUDIO INPUT	1 CH : 3.5 mm interface, shared with two-way audio
CONNECTIVITY	AUDIO COMPRESSION	G711A / U
	AUDIO OUTPUT	1 CH : 3.5 mm interface
	NETWORK	RJ45
	NETWORK PROTOCOL	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
	WEB SERVER	Built-in
EVENT HANDLING	CONCURRENT USERS	6
	ONVIF	Profile S
	ANALOG VIDEO OUTPUT	1CH BNC output
EDGE RECORDING	RS485	Yes
	ALARM INPUT	1CH
	RELAY OUTPUT	1CH
POWER	TF Card	Max. 128GB
	INPUT VOLTAGE	12VDC
	MAX. RATING	< 4W
OPERATING ENVIRONMENT	POE	Yes
	POWER OUTPUT	Max. 12V@0.5A
	AMBIENT TEMPERATURE	-20°C ~ 55°C
	RELATIVE HUMIDITY	10%-90%
	DIMENSION	140mm x 74.3mm x29mm
	WEIGHT	220g