





Features

- 4K IR Dome
- 1/2.5" 8MP SONY CMOS sensor
- Max. resolution: 3840 × 2160
- H.265 / Enhanced H.264 compression
- Electric vari-focal f=3.3mm ~ 12mm lens
- Angle of view: 97.5° ~ 38.5°
- 20-30m IR illumination range
- IP66 & IK10 ingress protection
- Power over Ethernet
- ONVIF Profile S

Dimension

Unit: mm

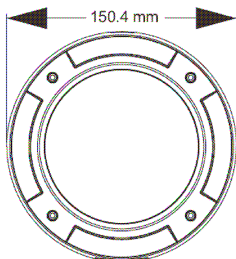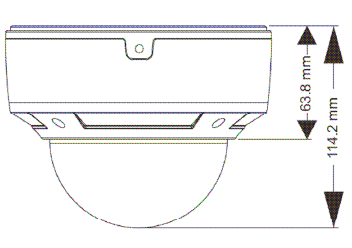

Specifications

MODEL		MP855AE-HD
VIDEO	IMAGE SENSOR	1/2.5" 8MP SONY CMOS
	RESOLUTION	8MP (3840×2160), 1080P (1920×1080), 720P (1280×720), D1, CIF, 480x240
	FRAME RATE	Up to 25/30fps
	MINIMUM ILLUMINATION	0.01 lux @F1.2, AGC ON; 0 lux with IR
	IR Distance	20~30M
	LENS	f=3.3mm ~ 12mm motorized lens
	ANGLE OF VIEW	97.5° ~ 38.5°
	ELECTRONIC SHUTTER	1 / 25 s ~ 1 / 100000 s
	VIDEO SETTINGS	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc.
	ANALOG VIDEO OUTPUT	CVBS video output (BNC × 1)
AUDIO	INPUT	1CH
	OUTPUT	1CH
CONNECTIVITY	NETWORK INTERFACE	RJ45 × 1, 10M / 100M self-adaption
	NETWORK PROTOCOL	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
	CONCURRENT USERS	10
	WEB SERVER	Built-in
	ONVIF	Profile S
COMPRESSION	VIDEO COMPRESSION	H.265 / Enhanced H.264
	VIDEO STREAMING	3 Independent Streams
	MOTION DETECTION	Yes
	ACTION	Snap, Recording, Alarm output, Email
	ALARM INPUT	1
	ALARM OUTPUT	1
EDGE RECORDING	TF Card	Max. 128GB
POWER	VOLTAGE	12VDC
	MAX. RATING	6.5W
	POE	YES
OPERATING ENVIRONMENT	AMBIENT TEMPERATURE	-20°C ~ 50°C
	RELATIVE HUMIDITY	10%-90%
MECHANICAL DESIGN	WEATHER PROOF	IP66
	VANDAL RESISTANT	IK10
	DIMENSION	Φ 150 mmx 114mm
	WEIGHT	1100g

TeleEye Group
Hong Kong China Malaysia Philippines
South Africa Sri Lanka Turkey U.K.

DISTRIBUTED BY:

www.TeleEye.com

Design and specifications are subject to change without prior notice. Copyright © 2017 Signal Communications Limited. TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.

Printed: 2017.07