

MQ6131-HD

3MP Network 30x Optical Zoom IR Speed Dome


- 1/2.8" 3MP Progressive CMOS Sensor
- Max. Resolution: 2048 x 1536 @20/30fps
- 30x Optical Zoom
- 100M IR Distance
- H.265 / Enhanced H.264 Compression
- IP66 Weather Proof
- TVS 6KV Lightning Protection, Surge Protection



Model

MQ6131-HD

Unit: mm

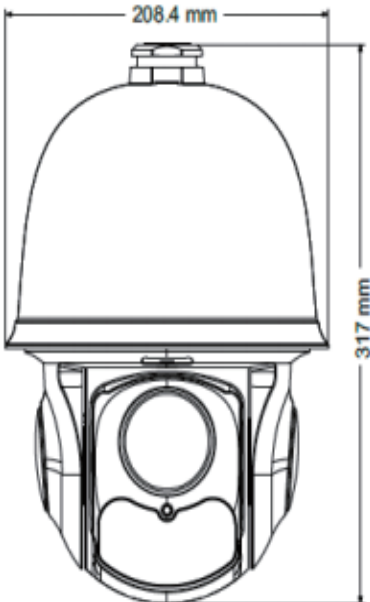

VIDEO	IMAGE SENSOR	1/2.8" 3MP Progressive CMOS
	MAX. RESOLUTION	2048 x 1536 (3MP)
	FRAME RATE	Up to 30fps
	MINIMUM ILLUMINATION	0.0Lux, IR ON, ~100M IR distance
	LENS	30x Optical zoom, f=4.5mm ~135mm, F1.6~F4.4
AUDIO	VIEW ANGLE	59.8°~ 2.34°
	ELECTRONIC SHUTTER	Auto/ Manual (1/25~1/100000s, 22 level)
FUNCTION	INPUT	1 CH
	OUTPUT	1 CH
	PAN RANGE	360° endless rotation
	PAN SPEED	Preset speed: 150°/s; Manual control speed: 0.5 ~ 80°/s
	TILT RANGE	0 ~ 93° (auto rotation)
	TILT SPEED	Preset speed: 120°/s; Manual control speed: 0.5 ~ 70°/s
	PRESET	360
	CRUISE	8
	TRACK	4
	TIME TASK	8
CONNECTIVITY	SCAN	2
	HOME POSITION	Yes
	OSD MENU	Englih
	NETWORK INTERFACE	RJ-45
COMPRESSION	NETWORK PROTOCOL	TCP / IP, UDP, DHCP, DDNS, NTP, RTSP, SMTP, FTP, PPPoE
	WEB SERVER	Built-in
EVENT HANDLING	ONVIF	Profile S
	VIDEO COMPRESSION	H.265 / Enhanced H.264
EDGE RECORDING	VIDEO STREAMING	3
	ALARM INPUT	1
POWER	ALARM OUTPUT	1
	TF CARD	Max. 128GB
OPERATING ENVIRONMENT	POWER SUPPLY	24V / 2500mA
	MAX. RATING	15W / 30W (IR on)
	AMBIENT TEMPERATURE	-30°C ~ 60°C
MECHANICAL DESIGN	RELATIVE HUMIDITY	0% - 95%
	WATER PROOF	IP66
	PROTECTION LEVEL	TVS 6KV lightning protection, surge protection
	DIMENSION	209 x 317mm
	WEIGHT	3.8kg

Terms & Conditions 使用細則

Design and specifications are subject to change without prior notice. Copyright © 2019 Signal Communications Limited. TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.