




Features

- WQHD (2560 x 1440)
- Enhanced H.264
- Hacker Resistant
- Pre / Post Alarm Image
- Arm / Disarm Interface
- E2E Health Check
- Duplicated Recording

Dimensions

Unit: mm



Specifications

MODEL		GN6516	GN6608
CAMERA INTERFACE	CONFIGURATION	Shared Network	Dedicated Network
	RESOLUTIONS	WQHD, 1080P, 720P	
	MAX. CHANNELS	16	8
	DEDICATED VIDEO PORTS	-	8x, 100base-T, PoE
	COMPATIBLE MODELS	TeleEye MP400, MP200, MQ & ONVIF (Profile S)	
VIDEO	OUTPUTS	1 x HDMI, 1 x VGA (max. resolution 1080p)	
CODING	VIDEO & AUDIO	Enhanced H.264, H.264	
RECORDING	MODE	Manual, Scheduled, Event-driven	
	STORAGE	2 x SATA, internal	
	MAX. RECORDING PERFORMANCE	25fps per channel @ WQHD	
	DUPLICATED RECORDING	Yes	
EVENT	TYPES	External Alarm, Video Motion Detection, System Tamper, Power Interruption, HDD Failure	
	ACTIONS	Dial Back, Buzzer, Email Notification, Relay Control, Telemetry Preset	
	CONTROLS	Arm / Disarm, Security Switch, Power Interruption, System Tamper	
	ALARM INPUTS	4x on DVR or Alarm Inputs on Cameras	
	VIDEO MOTION DETECTION	Yes	
	PRE / POST ALARM IMAGE SEQUENCE	Yes	
AUDIO	INPUTS	1 x RCA on DVR or Audio Inputs on Cameras	
	OUTPUTS	1 x RCA on DVR or Audio Outputs on Cameras	
COMMUNICATION	NETWORK	100 / 1000 BASED-T	
	SURELINK	Yes	
	THROUGHPUT CONTROL	Yes	
	WEB SERVER	Built-in	
	JOYSTICK CONTROL	RX-KB05	
	USB	3 x USB 2.0	2 x USB 2.0
POWER	RATING	DC 12V, 4A	DC 48V, 3A
OPERATING ENVIRONMENT	AMBIENT TEMPERATURE	-10°C - 55°C	
	RELATIVE HUMIDITY	10% - 90%	
MECHANICAL DESIGN	DIMENSION	360mm x 242mm x 48mm	
	WEIGHT (kg)	1.8kg	2.0kg

www.TeleEye.com

TeleEye Group

Hong Kong Bangladesh China Malaysia Philippines
South Africa Sri Lanka Turkey U.K.

DISTRIBUTED BY:

Design and specifications are subject to change without prior notice. Copyright © 2014 Signal Communications Limited. TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.


Printed: 2016



Features

- WQHD (2560 x 1440)
- Enhanced H.264
- Hacker Resistant
- Pre / Post Alarm Image
- Arm / Disarm Interface
- E2E Health Check
- Duplicated Recording

Dimensions

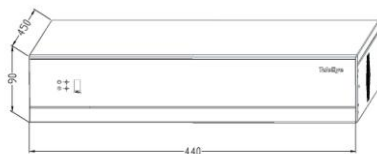

Specifications

MODEL		GN6916
VIDEO INPUT	NO. OF CHANNELS	16
	RJ45, 10/100/1000 BASE-T	1
VIDEO OUTPUT	DIGITAL VIDEO	1 Channel, 1280x720, 1920x1080
	VGA	1 Channel, 1280x720, 1920x1080
	DISPLAY SCREEN	Full, Quad, 3x3, 4x4
AUDIO INPUT	NO. OF CHANNELS	1
	RCA	1x RCA on DVR or Audio Inputs on Cameras
AUDIO OUTPUT	NO. OF CHANNELS	1
	RCA	1x RCA on DVR or Audio Outputs on Cameras
RECORDING	MODE	Manual, Scheduled, Event-driven
	HDD	8, Max. 8TB per HDD
	MAX. RECORDING RATE	25/30fps per channel @ WQHD
	PLAYBACK	Start, Stop, Play, Pause, Fast play, Step
COMMUNICATION	NETWORK	Yes
	CONCURRENT USERS	6 (independent)
	sureLINK	Yes
	MAX. TRANSMISSION FRAME RATE	400/480fps
	WEB SERVER	Built-in
	JOYSTICK CONTROL	RX-KB05
EVENT HANDLING	USB	3 x USB 2.0
	EVENT	External alarm, Video motion detection, Video loss, Power interruption, Disk full, System failure, Disk Failure
	ACTION	Dialback, Buzzer, Email Notification, Relay Control, Telemetry Preset
RELAY SWITCH	EXTERNAL ALARM INPUTS	4
	NO. OF CHANNELS	4
POWER	MAX. RATING	24V AC, 1000mA
	VOLTAGE	AC 100-240V, 3.5-2A
OPERATING ENVIRONMENT	MAX. RATING	18W (Without HDD)
	AMBIENT TEMPERATURE	-10°C - 55°C
MECHANICAL DESIGN	RELATIVE HUMIDITY	10% - 90% (no condensation)
	DIMENSION (mm)	440(L)x450(W)x97(H)
	WEIGHT (kg)	4

www.TeleEye.com

TeleEye Group

Hong Kong Bangladesh China Malaysia
Philippines South Africa Sri Lanka Turkey U.K.

DISTRIBUTED BY: