




## Features

- Max. recording resolution: 4MP (2560 x 1440)
- SMAC-M, H.264 video compression
- 8 internal SATA HDD
- DVI/VGA video outputs
- Video extraction through network or using USB flash drive
- Video management software with sureSIGHT
- Supporting sureLINK for dynamic IP Internet connection
- iView HD for remote monitoring on mobile phones
- ONVIF Profile S
- RAID 5 support

## Specifications

MODEL		sureREC-HDR-16R	sureREC-HDR-32R
CAMERA INTERFACE	MAX. CHANNELS	16	32
	COMPATIBLE MODELS	TeleEye MX, MP400, MP200, MQ & ONVIF* (Profile S) <small>*License is required</small>	
VIDEO	OUTPUTS	1 x DVI, 1 x VGA (max. resolution 1080p)	
CODING	VIDEO & AUDIO	SMAC-M, H.264	
RECORDING	MODES	Manual, Scheduled, Event-driven	
	STORAGE	SATA, internal x 8	
	MAX. RECORDING PERFORMANCE	25 fps per channel @ WQHD	
	RAID	RAID 5	
EVENT	TYPES	IPC alarm, IPC motion detection, Video loss, Recording failure	
	ACTIONS	Alert sound, Email notification, Event recording	
AUDIO	INPUTS	MIC IN X 1	
	OUTPUTS	LINE OUT X 1	
COMMUNICATION	NETWORK	Gigabit port x 1	
	SURELINK	YES	
	USB	USB2.0 x 6	
	DVD WRITER	YES	
CPU		Intel® Core™ i5	
MEMORY		4 GB DDR3 Ram	
OPERATING SYSTEM		MS® Windows 7 Professional Edition (64-bit)	
POWER	VOLTAGE	110-240V AC	
	MAX. RATING	500W	
OPERATING ENVIRONMENT	AMBIENT TEMPERATURE	0°C - 40°C	
	RELATIVE HUMIDITY	10% - 85%	
MECHANICAL DESIGN	DIMENSION	437mm (W) x 534mm (D) x 89mm (H)	
	WEIGHT	10KG	

## Dimensions

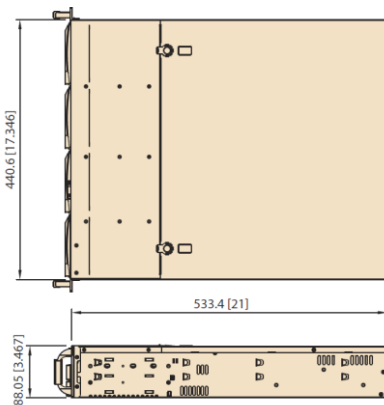

www.TeleEye.com

## TeleEye Group

Hong Kong Bangladesh China Malaysia Philippines  
South Africa Sri Lanka Turkey U.K.

DISTRIBUTED BY:

Design and specifications are subject to change without prior notice. Copyright © 2015 Signal Communications Limited. TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.