


- 8CH analog video input, compatible with 4K/ 5MP/ 4MP/ 1080p/ 720p AHD camera and CVBS input
- H.265/ H.264 video compression
- 2 SATA HDD, up to 8TB per HDD
- HDMI (4K) / VGA / BNC video outputs
- 8CH playback
- Video management software with sureSIGHT
- Supporting sureLINK for dynamic IP Internet connection
- iView HD for remote monitoring on mobile phones



Unit: mm

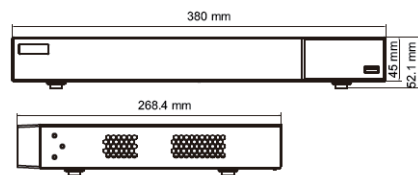

Model

JN6808-S

VIDEO INPUT	ANALOG CAMERA	compatible with 4K / 5MP / 4MP / 1080P / 720P AHD camera and CVBS input	
	NO. OF CHANNEL	8	
VIDEO OUTPUT	IP CAMERA	Compatible with 4K / 5MP / 4MP / 3MP / 1080P / 720P IP camera	
	NO. OF CHANNEL	8	
AUDIO	DIGITAL VIDEO	1 channel, 3840 x 2160, 1920 x 1080, 1280 x 1024	
	VGA	1 channel, 1920 x 1080, 1280 x 1024	
	BNC	CVBS (used as the main or spot output)	
RECORDING	INPUT	RCA x 8	
	OUTPUT	RCA x 1	
COMMUNICATION	IP CAMERA AUDIO INPUT	8	
	COMPRESSION	H.265/ H.264	
	MODE	Manual, Schedule, Motion, Event-driven	
	HD TYPE	SATA X2 (Max. 8TB per HDD)	
	ANALOG RECORDING FRAME RATE	Normal:	4K@6fps (PAL) / 7fps (NTSC) 5MP@12fps (PAL / NTSC) 4MP@12fps (PAL) / 15fps (NTSC) 1080P@25fps (PAL) / 30fps (NTSC) 720P@25fps (PAL) / 30fps (NTSC) CVBS WD1@25fps (PAL) / 30fps (NTSC)
		Lite mode:	4K Lite(1920x2160)@12fps (PAL) / 15fps (NTSC) 5MP Lite(1280x1936)@20fps (PAL / NTSC) 4MP Lite(1280x1440)@25fps (PAL) / 30fps (NTSC),
		PLAYBACK	8CH playback Play, Forward, Backward, Pause, Digital zoom
		NETWORK	RJ45 1000Mbps x 1
	EVENT HANDLING	CONCURRENT USER	6
		WEB SERVER	Built-in
RS485		RS485 x1, connect to PTZ or keyboard	
POWER	USB	USB2.0 x 2	
	EVENT TYPE	Video motion detection, External alarm, Video loss	
OPERATING ENVIRONMENT	ACTION TYPE	Recording, Snap, Email, Preset	
	ALARM INPUT	8	
MECHANICAL DESIGN	RELAY OUTPUT	2	
	VOLTAGE	DC 12V	
MECHANICAL DESIGN	POWER SUPPLY	DC 12V / 4A	
	MAX. RATING	≤ 15W (without HDD)	
MECHANICAL DESIGN	AMBIENT TEMPERATURE	-10°C - 50°C	
	RELATIVE HUMIDITY	10% - 90%	
MECHANICAL DESIGN	DIMENSION	380mm (W) x 280mm (D) x 52mm (H)	
	WEIGHT	1.6 kg	

Terms & Conditions 使用細則

Design and specifications are subject to change without prior notice. Copyright © 2018 Signal Communications Limited. TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.