



Features



- Hi-resolution: 550 TV lines
- Auto Iris Lens
- Minimum illumination: 0.15 Lux / F1.2 ; Sense Up: 0.02 Lux / F1.2
- Auto Gain Control
- Back Light Compensation
- CS / C mount

Specifications

MODEL	SF360	
PICK UP DEVICE	1/3" SONY CCD	
TOTAL PIXELS	PAL: 752 (H) x 582 (V)	NTSC: 811 (H) x 508 (V)
HORIZONTAL RESOLUTION	550 TVL	
AUTO IRIS LENS	Video / DC switchable	
LENS MOUNT	CS / C mount	
MIN. ILLUMINATION	0.15 Lux / F1.2 Sense Up: 0.02 Lux / F1.2	
ELECTRONIC SHUTTER	PAL 1/50 ~ 1 / 100,000 sec	NTSC 1/60 ~ 1 / 100,000 sec
ELECTRONIC SHUTTER CONTROL	On / Off switchable	
BACK LIGHT COMPENSATION	On / Off selectable	
S / N RATIO	More than 50dB (AGC OFF)	
WHITE BALANCE	Auto	
VIDEO OUTPUT CONNECTOR	1.0 Vp-p, 75Ω	
AUTO GAIN CONTROL	Yes	
NOISE REDUCTION	Auto	
POWER SOURCE	12V DC / 24V AC	
OPERATING TEMPERATURE	-10°C ~ +50°C	
HUMIDITY	<90%	
NET WEIGHT (G)	250	
DIMENSION	99 (L) x 60 (W) x 49 (H) mm	

Dimensions

Unit: mm

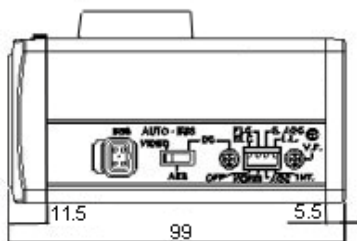

www.TeleEye.com

TeleEye Group

China Croatia Hong Kong Macau Mauritius
Philippines Singapore South Africa Sri Lanka U.K.

DISTRIBUTED BY: