




### Features

- WQHD IR Vari-Focal camera
- 1/3" 4MP CMOS sensor, 25/30fps
- H.265 / Enhanced H.264 compression
- 3 independent video streams
- f=3.3 ~ 12mm vari-focal lens
- 30~50M IR illumination range
- IP66 weather proof
- Power over Ethernet, PoE
- True day & night operation with auto IR-cut filter
- ONVIF Profile S

### Dimensions

Unit: mm

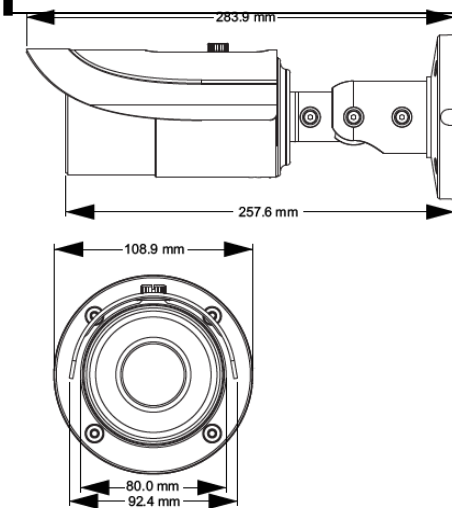

### Specifications

MODEL		MP475AE-HD
VIDEO	IMAGE SENSOR	1/3" 4MP CMOS Sensor
	RESOLUTION	2560 x 1440 / 2304 x 1296 / 1920 x 1080 (1080p) / 1280 x 720 (720p) / D1 / CIF / 480 x 240
	FRAME RATE	Up to 25/30fps
	MINIMUM ILLUMINATION	0.05 lux@F1.2, AGC ON; 0 lux with IR, 30-50M
	LENS	f=3.3 ~ 12mm
	ANGLE OF VIEW	80° ~ 38°
	AUTO IR-CUT FILTER	Yes
	VIDEO SETTINGS	Brightness/Contrast/Saturation, Region Of Interest Coding, Wide Dynamic, Sharpness, Noise Reduction
AUDIO	INPUT	1 ch
	OUTPUT	1 ch
CONNECTIVITY	NETWORK INTERFACE	RJ-45
	NETWORK PROTOCOL	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
	DYNAMIC IP	sureLINK, DDNS
	VIDEO MAIN STREAM RESOLUTION	2560 x 1440 / 2304 x 1296 / 1920 x 1080 / 1280 x 720
	VIDEO SUB STREAM 1 RESOLUTION	1280 x 720 / D1 / CIF
	VIDEO SUB STREAM 2 RESOLUTION	D1 / CIF / 480 x 240
	CONCURRENT USERS	10 (Independent)
	WEB SERVER	Built-in
INTERNAL RECORDING	ON-BOARD STORAGE	Built-in micro SD slot
EVENT HANDLING	EXTERNAL ALARM INPUT	1 ch
COMPRESSION	VIDEO COMPRESSION	H.265, Enhanced H.264
	VIDEO STREAMING	3 Independent Streams
POWER	POWER IN	12V DC / PoE
	MAX. RATING	2.5W / 6.5W (IR On)
OPERATING ENVIRONMENT	AMBIENT TEMPERATURE	-20°C - 50°C
	RELATIVE HUMIDITY	10 ~ 90% (No Condensation)
MECHANICAL DESIGN	WEATHER PROOF	IP66
	DIMENSIONS	Φ 109mm × 284mm
	NET WEIGHT	1150g

www.TeleEye.com

### TeleEye Group

Hong Kong China Malaysia Philippines  
South Africa Sri Lanka Turkey U.K.

DISTRIBUTED BY: