




Features

- 1/4" CCD
- Powerful 396x zoom ; Optical: 33x, Digital: 12x
- Resolution: 550 (Day) / 680 (Night) TVL
- IR Distance: 100m
- 255 presets, 6 patrols, 4 patterns
- IP66 weather proof standard
- OSD menu
- Wiper

Dimensions

Unit: mm

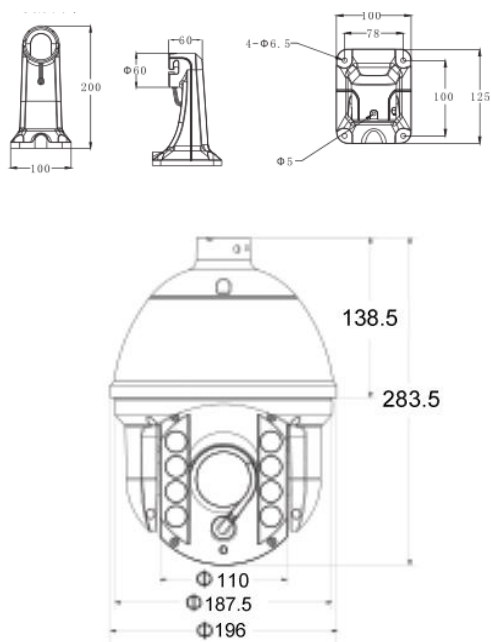

Specifications

MODEL	DM665
PICK UP DEVICE	1/4" CCD
HORIZONTAL RESOLUTION	Day: 550 TVL Night: 680 TVL
LENS	3.5 - 115.5mm, 33x optical zoom
MAX. APERTURE RATIO	F1.6(W) ~ F3.6(T)
VIEW ANGLE (HORIZONTAL)	1.6° - 55.5°
MIN. ILLUMINATION	0.0 Lux
D/N MODE	Optical filter change
DIGITAL ZOOM	12x zoom
ELECTRONIC SHUTTER	1/1 - 1/10,000 sec
FOCUS MODE	Auto / Manual
BACK LIGHT COMPENSATION	On / Off
S / N RATIO	More than 50dB
WIDE DYNAMIC RANGE	Yes
AUTO GAIN CONTROL	Auto / Manual
IR DISTANCE	100m
OSD MENU	Yes
CONTROL TYPE	RS485 bus
CONTROL PROTOCOL	PELCO-P & PELCO-D
POWER SOURCE	24V AC, 50Hz, 30W
OPERATING TEMPERATURE	-40°C ~ 65°C, humidity 90%
WEATHER PROOF STANDARD	IP66

www.TeleEye.com

TeleEye Group

Hong Kong Bangladesh China Malaysia Philippines
South Africa Sri Lanka Turkey U.K.

DISTRIBUTED BY: